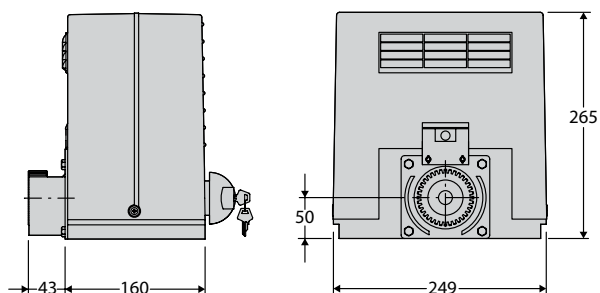



DEIMOS BT | | | |

	Code	Name	Description	
	P925209 00002	DEIMOS 300 BT	Operatore 24V per cancelli scorrevoli fino a 300kg di peso. Velocità anta 13m/min. Finecorsa a encoder.	
	P925178 00005	DEIMOS BT	Operator 24V for sliding gates up to 500kg in weight. Leaf speed 12m/min. Limit switch electromechanical.	
	P925178 00006	DEIMOS BT PROX	Operator 24V for sliding gates up to 500kg in weight. Leaf speed 12m/min. Limit switch inductive.	
	R925247 00002	KIT DEIMOS 300 BT FRA	Operatore 24V per cancelli scorrevoli fino a 300kg di peso. Velocità anta 13m/min. Finecorsa a encoder.	
	R925236 00002	KIT DEIMOS BT FAST NET EASY BUS	Operator 24V for sliding gates up to 500kg in weight. Leaf speed 12m/min. Limit switch electromechanical.	
	R925229 00002	KIT DEIMOS BT FRA	Operator 24V for sliding gates up to 500kg in weight. Leaf speed 12m/min. Limit switch electromechanical.	

	DEIMOS 300 BT	DEIMOS BT	DEIMOS BT FAST NET EASY BUS
Control unit	HQSC 300	HQSC	NETTUNO S
Power supply	24V	24V	24V
Power input	50W	70W	70W
Pinion module	4	4	4
Slowdown	yes	yes	yes
Impact reaction	d-track	d-track	electronic torque limiter
Locking	mechanical	mechanical	mechanical
Release	knob with triangular key	knob with triangular key	knob with triangular key
Frequency of use	intensive	intensive	intensive
Environmental conditions	from -15°C to 60°C		
Actuator weight	5.6kg	7kg	7kg

Dimensions

HQSC-D

HQSC-D

- Application: control unit for 1 24V operator for sliding gates
- Board power supply: 230V single-phase
- Operator power supply: 24V 80W
- Main features: simplified scenario-based programming with display, incorporated dual channel receiver, D-Track anti-crushing system, slowdown during opening and closing
- Main functions: automatic re-closing, fast closing, pedestrian opening
- Compatibility: QSC-D MA

Accessories

	Code	Name	Description
	D221073	CP	Plastic rack, 4-module, cross-section 22 x 22 mm, length 1 m, screw-fitted into slots
	D571053	CVZ	Steel rack, 4-module, cross-section 30 x 12 mm, length 1 m, screw-fitted on supports (supplied)
	N999151	SFD	Base plate for DEIMOS series (supplied with operator)
	N999320	CVZ-S	Steel rack, 4-module, cross-section 30 x 8 mm, length 1 m, screw-fitted on supports (supplied)



	P125002	SB BAT	SB BAT emergency battery kit for DEIMOS BT
	P125021	SB BAT 2	Set of backup batteries for DEIMOS 300 BT

